


- 230/460 Volts, 3 Phase.
- Totally Enclosed, Fan Cooled.
- Heavy Steel Frame.
- Ball Bearings.
- C-Face Less Base.



### MOTOR CHART

Order Number	H.P.	R.P.M.	NEMA Frame	Weight (lbs.)	Starting Torque (in. lbs.)	Running Torque (in. lbs.)	X Dim. (in.)	Y Dim. (in.)
2400231	1/4	1725	56C	18	30	9	9.38	4.50
2400232	1/4	1140	56C	19	36	13	9.38	4.50
2400233	1/3	1725	56C	20	45	12	9.38	4.50
2400234	1/3	1140	56C	21	53	18	9.38	4.50
2400235	1/2	1725	56C	22	63	18	9.38	4.50
2400236	1/2	1140	56C	23	74	27	9.38	4.50
2400237	3/4	1725	56C	25	105	27	9.38	4.50
2400238	3/4	1140	56C	32	116	40	11.30	4.50
2400239	1	1725	143TC	31	85	36	9.94	4.50
2400240	1	1140	145TC	37	122	54	11.25	5.25
2400241	1 1/2	1725	145TC	34	150	54	10.25	5.25
2400242	1 1/2	1140	145TC	40	134	84	11.25	5.25
2400243	2	1725	145TC	41	198	72	11.25	5.25
2400244	2	1140	184TC	65	252	108	13.94	6.00
2400245	3	1725	182TC	61	264	108	12.56	5.88
2400246	3	1140	213TC	105	409	162	15.56	7.44
2400247	5	1725	184TC	75	436	180	13.94	6.00
2400248	5	1160	215TC	133	783	270	16.68	7.44
2400249	7 1/2	1725	213TC	123	488	270	15.56	7.44
2400250	10	1725	215TC	138	732	360	16.58	7.44

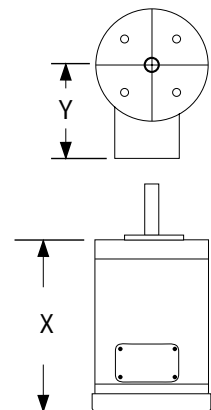

For other configurations contact factory.

NOTE: When sizing motors, Uni-Lift suggests using only 80% or less of running torque.