




PAM4535

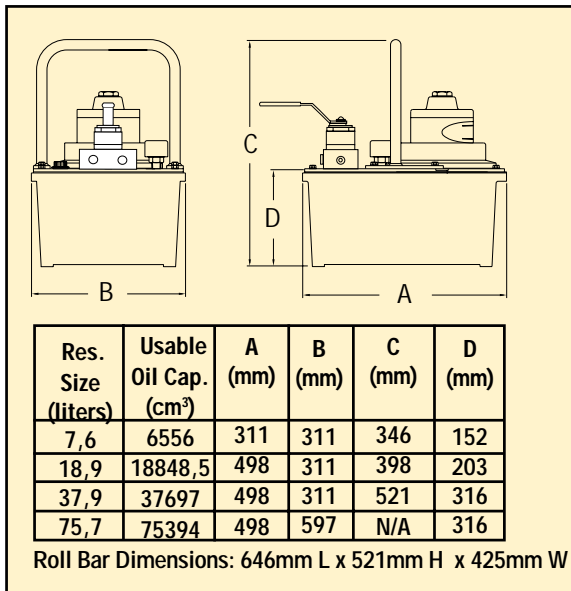

- 6 standard models.
- Suc-O-Matic feature reduces retraction time.
- Two-speed operation provides fast advance.
- Higher crossover for faster cylinder cycle.
- Rotary air @ 1.4 cu. meters per minute.
- Adjustable relief for variable pressure settings.
- Dual ports for easier plumbing.
- Available with remote air pendant control.
- Higher crossover for faster cycles.
- Large muffler for quieter operation.

PA-40 Series 1,1 Kw Air Powered Pumps - 700 bar capacity

	Model Number	Reservoir Size (liter)	Valve			Motor Specifications	Flow Rate	Weight (kg)	
			Model	Style	Function				
S/A	PAM4032	7,6	VP3*	3 Position 3 Way	Manual Lever Actuated	Advance/ Hold/ Retract	Rotary Air 1,4 cu. meters min. 6,2 bar	22,7	
	PAM4035	18,9						49,1	
D/A	PAM4042	7,6	VP4	Standard	3 Position 4 Way	Solenoid Actuated	Rotary Air 1,4 cu. meters min. 6,2 bar	22,7	
	PAM4045	18,9						49,1	
	PAS4042	7,6						VPA4	23,6
	PAS4045	18,9						VPA4	50

For more information on valve models, see pages 60-62.

* Includes Suc-O-Matic.

For quieter operation where compressed air is available, or for use in explosive environments. Delivers high speed operation for a variety of medium sized cylinders, hydraulic tools or systems.




A233

Air Filter-Lubricator

Provides lubricated and filtered air, and contributes to long and trouble free product life. Recommended for use with all air pumps.

PERFORMANCE CHART

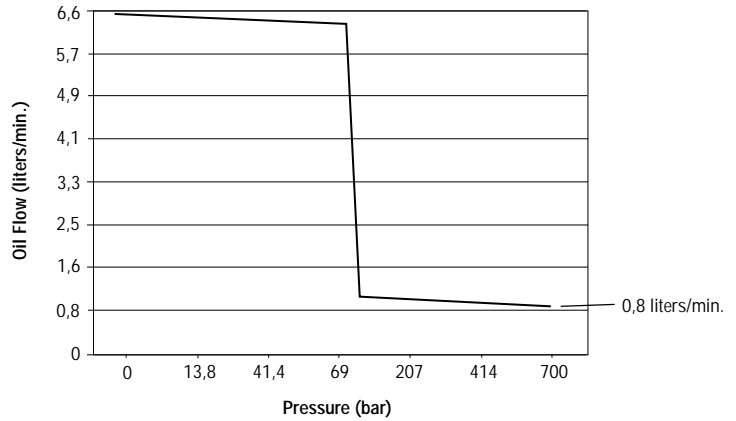

Hydraulic Cylinders pgs. 10-27	Hoses pgs. 66-67	Accessories & Fittings pgs. 63-68

CUSTOM BUILD

Using the chart below you can add roll bars, different size reservoirs or other options.


Description	Model	Selections
Product	P	Power Pump
Motor Controls	A	A = Rotary Air Motor
Valve Style	M	M = Manual S = Solenoid** D = Dump
Pump Series	4	Rotary Air @ 50 cfm
Options	1	0 = No Options 4 = Filter only 1 = Roll Bars only 5 = Roll Bars & Filter
Valve Type	3	2 = 2 Way 2 Position 5 = 3 Way Locking Style* 3 = 3 Way 3 Position* 6 = 4 Way Locking Style 4 = 4 Way 3 Position
Reservoir Size	5	2 = 7,6 liters 6 = 37,9 liters 5 = 18,9 liters 7 = 75,7 liters

* With Suc-O-Matic™

** Dump & 4 way valve only

40 SERIES AIR POWER PUMP OPTIONS

PUMP PROTECTION



■ P03 - Roll Bars
For 3,8, 7,6 & 18,9 liter reservoirs only. Order (1) under Options in the Custom Build Chart.



■ P04 - External filter for pumps with 3 & 4 way valves. Order (4) under Options in the Custom Build Chart. Replacement filter elements, use order number PO5E.

ALL PUMP OPTIONS ARE FACTORY INSTALLED