




- Easy to assemble.
- Visual wear inspection.
- Max. angular offset 1°.
- Max. parallel offset 0.015 inches.
- Sintered iron jaws, open center polyurethane spider.
- Temperature range -30° to 160° F.

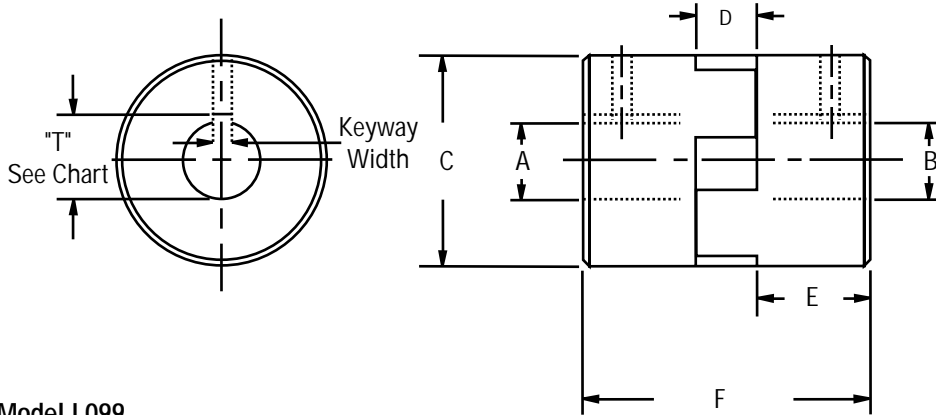

Model No.	C (in)	D (in)	E (in)	F (in)
L095	2 7/64	1/2	1	2 1/2
L099	2 17/32	3/4	1 1/16	2 7/8

Model L099

Rated Torque 477 in-lb

Rated H.P. 13 @ 1725 RPM

Item No.	Hub Finish Bore +.001/- .000			
	A Dia.	Keyway Width x "T"	B Dia.	Keyway Width x "T"
2486171	5/8	3/16 x .709	5/8	3/16 x .709
2486172	5/8	3/16 x .709	3/4	3/16 x .837
2486173	5/8	3/16 x .709	7/8	3/16 x .964
2486174	5/8	3/16 x .709	1	1/4 x 1.114
2486175	5/8	3/16 x .709	1 1/8	1/4 x 1.241
2486176	5/8	3/16 x .709	1 1/4	1/4 x 1.367
2486177	5/8	3/16 x .709	1 3/8	5/16 x 1.518
2486178	3/4	3/16 x .837	3/4	3/16 x .837
2486179	3/4	3/16 x .837	7/8	3/16 x .964
2486180	3/4	3/16 x .837	1	1/4 x 1.114
2486181	3/4	3/16 x .837	1 1/8	1/4 x 1.241
2486182	3/4	3/16 x .837	1 1/4	1/4 x 1.367
2486183	3/4	3/16 x .837	1 3/8	5/16 x 1.518
2486184	7/8	3/16 x .964	7/8	3/16 x .964
2486185	7/8	3/16 x .964	1	1/4 x 1.114
2486186	7/8	3/16 x .964	1 1/8	1/4 x 1.241
2486187	7/8	3/16 x .964	1 1/4	1/4 x 1.367
2486188	7/8	3/16 x .964	1 3/8	5/16 x 1.518
2486189	1	1/4 x 1.114	1	1/4 x 1.114
2486190	1	1/4 x 1.114	1 1/8	1/4 x 1.241
2486191	1	1/4 x 1.114	1 1/4	1/4 x 1.367
2486192	1	1/4 x 1.114	1 3/8	5/16 x 1.518
2486193	1 1/8	1/4 x 1.241	1 1/8	1/4 x 1.241
2486194	1 1/8	1/4 x 1.241	1 1/4	1/4 x 1.367
2486195	1 1/8	1/4 x 1.241	1 3/8	5/15 x 1.518
2486196	1 1/4	1/4 x 1.367	1 1/4	1/4 x 1.367
2486197	1 1/4	1/4 x 1.367	1 3/8	5/16 x 1.518
2486198	1 3/8	5/16 x 1.518	1 3/8	5/16 x 1.518

Model L095

Rated Torque 291 in-lb

Rated H.P. 8 @ 1725 RPM

Item No.	Hub Finish Bore +.001/- .000			
	A Dia.	Keyway Width x "T"	B Dia.	Keyway Width x "T"
2486122	5/8	3/16 x .709	5/8	3/16 x .709
2486123	5/8	3/16 x .709	11/16	3/16 x .773
2486124	5/8	3/16 x .709	3/4	3/16 x .837
2486125	5/8	3/16 x .709	13/16	3/16 x .900
2486126	5/8	3/16 x .709	7/8	3/16 x .964
2486127	5/8	3/16 x .709	15/16	1/4 x 1.051
2486128	5/8	3/16 x .709	1	1/4 x 1.114
2486129	5/8	3/16 x .709	1 1/16	1/4 x 1.178
2486130	5/8	3/16 x .709	1 1/8	1/4 x 1.241
2486139	3/4	3/16 x .837	3/4	3/16 x .837
2486140	3/4	3/16 x .837	13/16	3/16 x .900
2486141	3/4	3/16 x .837	7/8	3/16 x .964
2486142	3/4	3/16 x .837	15/16	1/4 x 1.051
2486143	3/4	3/16 x .837	1	1/4 x 1.114
2486144	3/4	3/16 x .837	1 1/16	1/4 x 1.178
2486145	3/4	3/16 x .837	1 1/8	1/4 x 1.241
2486152	7/8	3/16 x .964	7/8	3/16 x .964
2486153	7/8	3/16 x .964	15/16	1/4 x 1.051
2486154	7/8	3/16 x .964	1	1/4 x 1.114
2486155	7/8	3/16 x .964	1 1/16	1/4 x 1.178
2486156	7/8	3/16 x .964	1 1/8	1/4 x 1.241
2486161	1	1/4 x 1.114	13/16	1/4 x 1.114
2486162	1	1/4 x 1.114	1 1/16	1/4 x 1.178
2486163	1	1/4 x 1.114	1 1/8	1/4 x 1.241
2486166	1 1/8	1/4 x 1.241	1 1/8	1/4 x 1.241