







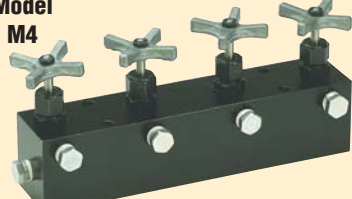
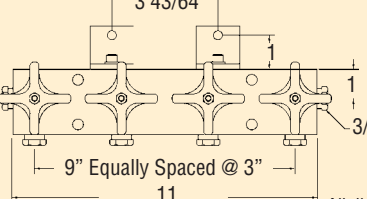












HIGH PRESSURE MANIFOLDS

<p>Model M1</p> 	<p>• Pump Mounted 4 Cylinder Control Manifold Kit: The M1 control manifold incorporates (4) station shut-off/flow control valves, 3' hose, gauge port, (4) high flow couplers and pump mounting hardware. Two or more manifolds can be coupled together for larger systems. For replacement hose order #89521.</p>	 <p>Equally Spaced @ 2 63/64 + 1 1/8 3/8" NPTF 9 3 43/64</p> <p>All dimensions in inches.</p>
<p>Model M2</p> 	<p>• Pump Mounted 4 Cylinder Manifold Kit: The M2 manifold includes 2' hose and pump mounting hardware. Two or more manifolds can be coupled together for larger systems. For replacement hose order #89521.</p>	 <p>3/8" NPTF 6 Places Equally Spaced @ 2 1/4 9</p> <p>All dimensions in inches.</p>
<p>Model M2A</p> 	<p>• Pump Mounted 2 Cylinder Control Manifold Kit: The M2A control manifold incorporates (2) station shut-off/flow control valves. Two or more manifolds can be coupled together for larger systems.</p>	 <p>3 43/64 1 3/16 1 3/8" NPTF 4 Places 3 1/4 5</p> <p>All dimensions in inches.</p>
<p>Model M3</p> 	<p>• 6 Port Inline Hex Manifold: The M3 inline hex manifold features (6) - 3/8" NPTF threaded ports & mounting holes.</p>	 <p>3/8" NPTF 1 1/2 2</p> <p>All dimensions in inches.</p>
<p>Model M4</p> 	<p>• Pump Mounted 4 Cylinder Control Manifold Kit: The M4 control manifold incorporates (4) station shut-off/flow control valves. Two or more manifolds can be coupled together for larger systems.</p>	 <p>3 43/64 1 3/8" NPTF 6 Places 9" Equally Spaced @ 3" 11</p> <p>All dimensions in inches.</p>

3/8" NPTF HIGH-PRESSURE 10,000 PSI FITTINGS

Hex Nipple	3" Nipple	6" Nipple	90° Elbow	90° St. Elbow	Tee	Coupling	Cross	3/8" M to 1/4" F	1/4" M to 3/8" F
									
F1	F3	F6	F7	F9	F11	F13	F15	F16	F17

SIMPLEX HYDRAULIC OIL

Model Number	Hydraulic Oil Qty.
A01	1 Gallon
A05	5 Gallons
A012	12 Quarts
A055	55 Gallons

Special, high pressure formulated, premium grade oil for all Simplex hydraulic products. High viscosity index insures maximum lubricity over a wide range of operating temperatures.



Viscosity Index	100 min.
VIS, SSU @100° F	150 - 155
VIS, SSU @ 210° F	45 - 50
VIS, SSU @ 0° F	< 15,000
Pour Point	-50° F
Flash Point	400° F
Aniline Point	204.8° F
Includes: Anti-Foam, Anti-Rust and Low Temperature Additives	