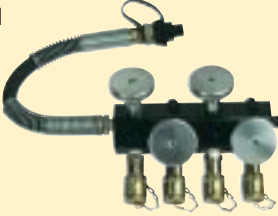
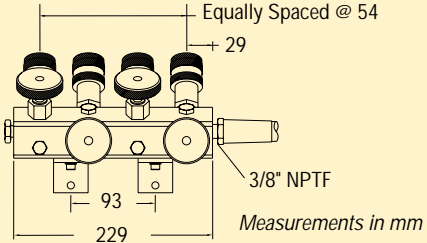
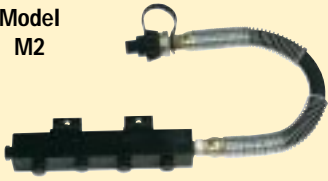
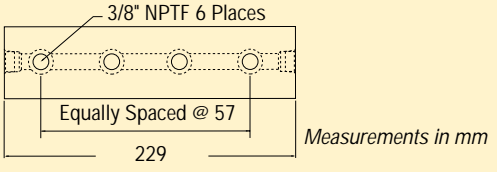

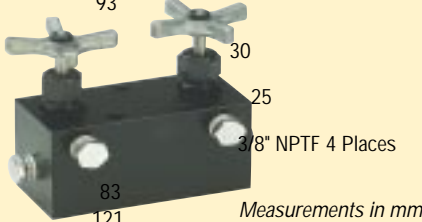

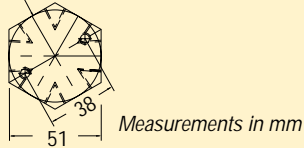
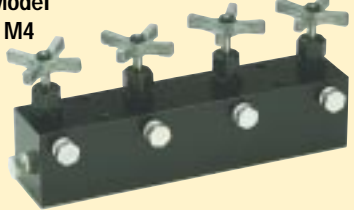
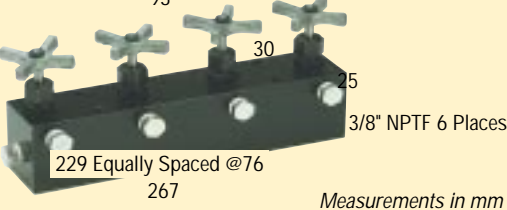












HIGH PRESSURE MANIFOLDS

<p>Model M1</p> 	<p>• Pump Mounted 4 Cylinder Control Manifold Kit: The M1 control manifold incorporates (4) station shut-off/flow control valves, 1 meter hose, gauge port, (4) high flow couplers and pump mounting hardware. Two or more manifolds can be coupled together for larger systems.</p>	
<p>Model M2</p> 	<p>• Pump Mounted 4 Cylinder Manifold Kit: The M2 manifold includes 0,6 meter hose and pump mounting hardware. Two or more manifolds can be coupled together for larger systems.</p>	
<p>Model M2A</p> 	<p>• Pump Mounted 2 Cylinder Control Manifold Kit: The M2A control manifold incorporates (2) station shut-off/flow control valves. Two or more manifolds can be coupled together for larger systems.</p>	
<p>Model M3</p> 	<p>• 6 Port Inline Hex Manifold: The M3 inline hex manifold features (6) - 3/8" NPTF threaded ports & mounting holes.</p>	
<p>Model M4</p> 	<p>• Pump Mounted 4 Cylinder Control Manifold Kit: The M4 control manifold incorporates (4) station shut-off/flow control valves. Two or more manifolds can be coupled together for larger systems.</p>	

3/8" NPTF HIGH-PRESSURE 10,000 PSI FITTINGS

Hex Nipple	76mm Nipple	152mm Nipple	90° Elbow	90° St. Elbow	Tee	Coupling	Cross	3/8" M to 1/4" F	1/4" M to 3/8" F
									
F1	F3	F6	F7	F9	F11	F13	F15	F16	F17

SIMPLEX HYDRAULIC OIL

Model Number	Hydraulic Oil Qty.
A01	3,8 liters
A05	18,9 liters
A012	11,4 liters
A055	208,2 liters

Special, high pressure formulated, premium grade oil for all Simplex hydraulic products. High viscosity index insures maximum lubricity over a wide range of operating temperatures.



Viscosity Index	100 min.
VIS, SSU @38° C	150 - 155
VIS, SSU @ 99° C	45 - 50
VIS, SSU @-18° C	< 15,000
Pour Point	46° C
Flash Point	204° C
Analine Point	96° C
Includes: Anti-Foam, Anti-Rust and Low Temperature Additives	