


CYLINDERS

30 - 60 TON ALUMINUM CENTER HOLE

Simplex Silver Lite Aluminum Cylinders Cut Carrying Weights Up To 60%.



- 4 standard models in 30 and 60 ton capacities.
- Chrome plated center sleeve for extra protection against wear & corrosion.
- Heavy duty spring for fast & full retraction.
- Hard anodized housing & piston reduce wear & corrosion.
- Carrying handles standard on all models.
- Steel base & piston for protection against load damage.
- Large bearing surfaces for side load protection.
- Rod wiper protects inner cylinder from dirt.
- Complies with ANSI/ASME B30.1 safety standards.

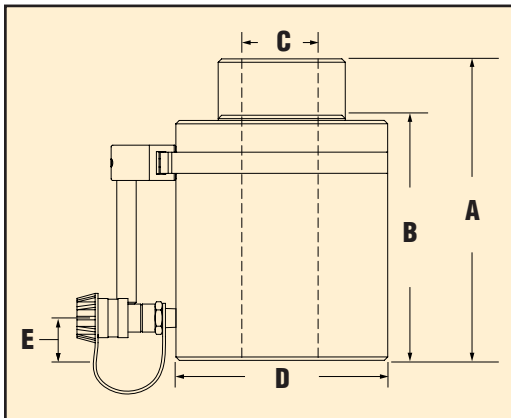

Aluminum Center Hole Single Acting Spring Return Cylinders 30 & 60 Ton Capacities

Model Number	Cap. (tons)	A Stroke (in)	B Min. Ht. (in)	Ext. Ht. (in)	Effect Area (sq in)	Oil Cap. Req'd (cu in)	C Center Hole (in)	D Cyl. Bore Dia. (in)	E Base To Port C/L (in)	Weight (lbs)	Sugstd. Hand Pumps
RAC303	30	3	8 3/4	13 3/4	7.21	22	1 3/16	5 1/2	1	22	P42/P72
RAC306		6	11 3/4	17 3/4		44					P72/P82
RAC603	60	3	10 1/8	13 1/8	12.3	37	2 1/8	5 1/2	1	42	P72/P82
RAC606		6	13 1/4	19 1/4		74					55

CUSTOM STROKES AND CAPACITIES AVAILABLE, CONTACT FACTORY