


Simplex Reel Jacks Are Standard Equipment At Utilities.

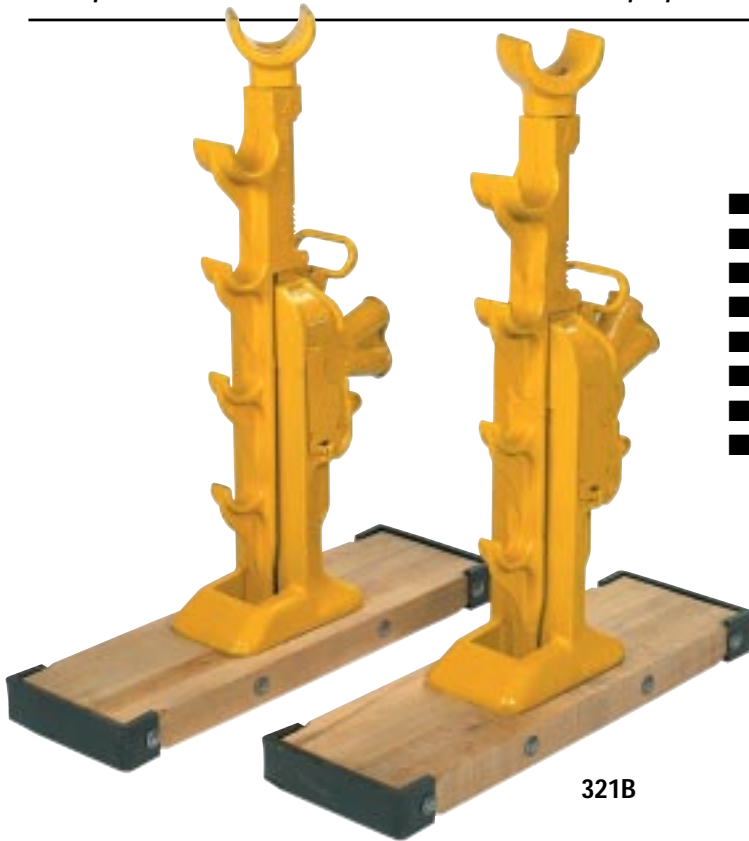

321B

- 4 Models.
- Double-lever sockets.
- Multiple-tooth pawls for strength & safety.
- Forged alloy steel, heat-treated components.
- Adjustable spring links.
- Plated springs to resist corrosion.
- Precision machining throughout.
- Steel lever bars sold separately.

■ **Model 320B**

With three hooks; top fits up to 64mm spindles; side hooks fit up to 51mm spindles.

■ **Model 321B (shown above)**

With five hooks; top fits up to 89mm spindles, next hook down fits up to 76mm spindles, and lowest three fit up to 60mm inch spindles. This model is recommended for use on firm surfaces.

■ **Model A1029**

The A1029 has a light weight aluminum alloy housing and three hooks; top fits up to 76mm spindles, side hooks fit up to 60mm inch spindles. Equipped with right or left-handed t-base, supported by three adjustable steel rods to provide a sturdy, non-rocking foundation for outside use. Caps swivel for easy reel mounting. Steel lever bars are ordered separately.



Using A1029-R and A1029-L, utilities can easily handle large reels. The large wooden bases and low handle efforts enhance safety and reduce operator fatigue. Simplex Reel Jacks are also an excellent choice for wire rope and sling manufacturers.

Reel Jacks

Model Number	Capacity per Pair		Handle Effort per Ton (kg)	Stroke (mm)	Reel Dia. (mm)	Top Hook Hgt. (mm)	Weight (kg)	Steel Lever Bars			
	Side Hooks (tons)	Top Hooks (tons)						Order Number	Length (mm)	Dia. (mm)	Weight (kg)
320B	5	10	14,5	254	508-1524	533	23,2	10640	914	25	3,6
321B				305	508-2438	876	58,2				
A1029-R	10	20	10,0	205	914-2134	791	39,1	*10665	1524	32	7,7
A1029-L											

*Lever bar 10675 can be substituted resulting in lower handle effort.