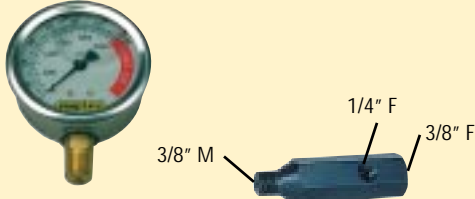


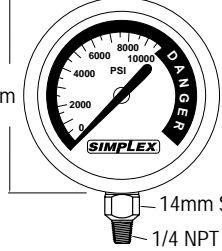

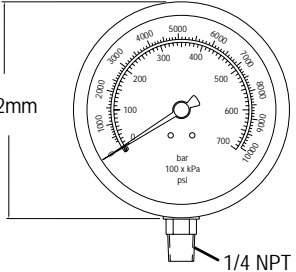



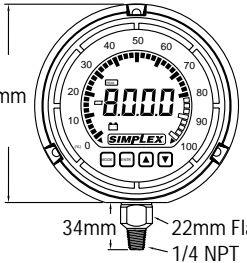
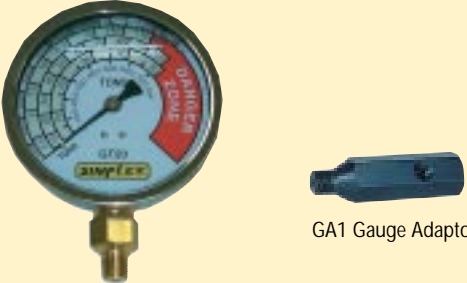


ACCESSORIES

ANALOG & DIGITAL GAUGES

 <p>G5 64mm Gauge 34,5 bar Increment</p> <p>GA1 Gauge Adaptor</p>	<p>Description</p> <p>The G5 is a high quality compact liquid filled gauge that reads in both PSI and Bar. Liquid filled to dampen needle vibration, the G5 is perfect for applications up to 700 bar.</p> <ul style="list-style-type: none"> ■ Liquid filled dampens needle vibration. ■ ±1% full scale accuracy. ■ 34,5 bar increment. ■ Stainless steel casing. 	<p>Dimensions</p>  <p>64mm 14mm Square 1/4 NPT</p>																										
 <p>G6 102mm Gauge 34,5 bar Increment</p> <p>GA1 Gauge Adaptor</p>	<p>The G6 is a larger, easy to read liquid filled gauge that's in both PSI and Bar with increments of 34,5 bar. The calibrated scale reads from 0-700 bar with 700 to 1035 bar as a warning zone.</p> <ul style="list-style-type: none"> ■ Liquid filled dampens needle vibration. ■ ±1% full scale accuracy. ■ Large easy to read 102mm face. ■ Rubber blowout plugs for safety. ■ Stainless steel casing. 	<p>Dimensions</p>  <p>102mm 14mm Square 1/4 NPT</p>																										
 <p>G7 102mm Gauge 10 bar Increment</p> <p>GA1 Gauge Adaptor</p>	<p>The G7 is a larger, easy to read liquid filled gauge that's in both PSI and Bar with increments of 100 PSI/10bar. The calibrated scale reads from 0-700 bar.</p> <ul style="list-style-type: none"> ■ Liquid filled dampens needle vibration. ■ ±1% full scale accuracy. ■ Large easy to read 102mm face. ■ Rubber blowout plugs for safety. ■ Stainless steel casing. ■ Standard on all Simplex Torque Wrench Pumps. 	<p>Dimensions</p>  <p>102mm 1/4 NPT</p>																										
 <p>GD1 64mm Digital Gauge</p> <p>GA1 Gauge Adaptor</p>	<p>The GD1 is designed for the high cycle pressure application where mechanical gauges don't hold up. The GD1 is a direct mount, compact gauge with an all stainless steel sensor that is vibration & shock resistant.</p> <ul style="list-style-type: none"> ■ Self powered Lithium batteries. ■ Full 4 digit display. ■ ±.25% full scale accuracy. ■ 10 million cycle life minimum. 	<p>Dimensions</p>  <p>68mm 16mm 1/4 NPT</p>																										
 <p>GD2 102mm Digital Gauge</p> <p>GA1 Gauge Adaptor</p>	<p>The GD2 digital gauge combines the best features of analog and digital instruments. The 19mm high full 4 digit display is easily read at a distance and the "analog" bar graph allows instant estimation of changing pressures. The all stainless steel sensor is vibration and shock resistant.</p> <ul style="list-style-type: none"> ■ 19mm characters and 270° bar graph "analog" readout. ■ Splash proof phenolic housing. ■ ±.25% full scale accuracy. ■ Keypad enable/disable of peak high or peak low hold. 	<p>Dimensions</p>  <p>138mm 34mm 22mm Flats 1/4 NPT</p>																										
 <p>Tonnage Gauge</p> <p>GA1 Gauge Adaptor</p>	<table border="1"> <thead> <tr> <th>Model Number</th> <th>Calibrated Range (0-700 bar) and Tons</th> <th>Face Dia. (mm)</th> <th>Cylinders Used With</th> </tr> </thead> <tbody> <tr> <td>GT5</td> <td>0 - 5, 10, 15</td> <td rowspan="7">102</td> <td>All 5, 10 & 15 Ton Models</td> </tr> <tr> <td>GT20</td> <td>0 - 20, 50</td> <td>All 20 & RF, RFS, RL & RLS 50 Ton Models</td> </tr> <tr> <td>GT25</td> <td>0 - 25, 55, 100</td> <td>All 25, 55 & RF, RFS, RL & RLS 100 Ton Models</td> </tr> <tr> <td>GT30</td> <td>0 - 30, 50, 100</td> <td>30 Ton Models, 50 & 100 RLR & RLN</td> </tr> <tr> <td>GT100</td> <td>0 - 100, 150, 200</td> <td>RDA100 & 200 Series, RLR & RLN 150 & 200</td> </tr> <tr> <td>GTH12</td> <td>0 - 12, 20, 30</td> <td>12, 20 & 30 Ton RC & RCD Series</td> </tr> <tr> <td>GTH60</td> <td>0 - 60, 100, 150</td> <td>60, 100, & 150 Ton RC & RCD Series</td> </tr> </tbody> </table>	Model Number	Calibrated Range (0-700 bar) and Tons	Face Dia. (mm)	Cylinders Used With	GT5	0 - 5, 10, 15	102	All 5, 10 & 15 Ton Models	GT20	0 - 20, 50	All 20 & RF, RFS, RL & RLS 50 Ton Models	GT25	0 - 25, 55, 100	All 25, 55 & RF, RFS, RL & RLS 100 Ton Models	GT30	0 - 30, 50, 100	30 Ton Models, 50 & 100 RLR & RLN	GT100	0 - 100, 150, 200	RDA100 & 200 Series, RLR & RLN 150 & 200	GTH12	0 - 12, 20, 30	12, 20 & 30 Ton RC & RCD Series	GTH60	0 - 60, 100, 150	60, 100, & 150 Ton RC & RCD Series	
Model Number	Calibrated Range (0-700 bar) and Tons	Face Dia. (mm)	Cylinders Used With																									
GT5	0 - 5, 10, 15	102	All 5, 10 & 15 Ton Models																									
GT20	0 - 20, 50		All 20 & RF, RFS, RL & RLS 50 Ton Models																									
GT25	0 - 25, 55, 100		All 25, 55 & RF, RFS, RL & RLS 100 Ton Models																									
GT30	0 - 30, 50, 100		30 Ton Models, 50 & 100 RLR & RLN																									
GT100	0 - 100, 150, 200		RDA100 & 200 Series, RLR & RLN 150 & 200																									
GTH12	0 - 12, 20, 30		12, 20 & 30 Ton RC & RCD Series																									
GTH60	0 - 60, 100, 150		60, 100, & 150 Ton RC & RCD Series																									